

# **Specifications**

**Input Voltage:** 100 ~ 240Vac, 50/60Hz **LED Driver Efficiency:** 93% typical value

Power Factor: 0.96

Surge Protection Level: 10kV line-earth

Working Environment:  $-40\,^{\circ}\text{C}^{\sim} + 40\,^{\circ}\text{C}$ ,  $10\%\,^{\sim} 90\%\,\text{RH}$ Storage Environment:  $-40\,^{\circ}\text{C}^{\sim} + 50\,^{\circ}\text{C}$ ,  $10\%\,^{\sim} 90\%\,\text{RH}$ 

Housing: Extrusion

IP Rating of LED Engine: IP68

IP Rating of luminaire: IP66

Warranty: 5 Years Limited

#### **Features**

#### Construction

- Whole structure heating dissipation design with efficient thermal conduction and radiation.
- Unique patented IP68 LED light engine.
- Foldable structure, easy for shipment and installation.
- Tempered glass cover, easy to clean. Optional PC cover.

#### **Lighting Sources**

Spectrums from customized LEDs desirable for plants growth

### **Applications**

• Vertical farming facilities, indoor agriculture, cannabis growing, etc.

LED Horticulture Light

## **Ordering Information**

Example: TF52P-6-650-XA-270-6105-XX-IN-DG

Luminaire Type	Module Qty	System Power	LED Package	Cable Standard
TF52P Horticulture light	<b>6</b> 6 modules	<b>650</b> 650W	X Others	A CCC+VDE C PSE H UL X Others
LED Qty per Module	Lens Code	Brand of LEDs	Driver Brand	Housing Color
<b>270</b> 270pcs	6105 Lambertian type	XX Others	IN INVENTRONICS PL POWERLAND	<b>DG</b> Dark Grey

## Performance


Model	Power (W)	PPF/W (μmol/J)	PPF (μmol/s)
TF52P	650	2.5	1625

Note: Typical values above with tolerance of 5%.

#### **Product Dimensions**

Model	L	W	H	N.W.
	(mm)	(mm)	(mm)	(kg)
TF52P	1175	1095	87	15.1

Note: Typical values above. Tolerance of N.W.:  $\pm 5\%$ . Tolerance of L/ W/ H:  $\pm 5$ mm



# **Package Information**


Package A: Luminaire Body


Model	L	W	H	G.W.
	(mm)	(mm)	(mm)	(kg)
TF52P	1240	660	200	13.7

Note: Typical values above. Tolerance of G.W.:  $\pm 5\%$ . Tolerance of L/ W/ H:  $\pm 5$ mm

#### Package B: LED Driver


Driver Brand	Pcs/Ctn	L (mm)	W (mm)	H (mm)	G.W. (kg)
INVENTRONICS	5	380	380	520	22.5
POWERLAND	5	460	360	620	25.5



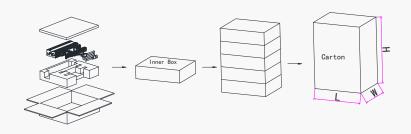


LED Horticulture Light

# Spectrum

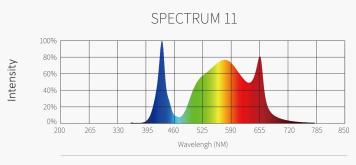



Spectral Distribution


### **Testing Points**





# **Output PPFD Testing Data**




















## TF52P

LED Horticulture Light

# **Version History**

Change Date	Version	Description of Change			
Change Date	VEISIOII	Item	From	То	
2021/06/09	Rev.A	Datasheet Pre-release	/	/	
2021/07/02	Rev B.	wordings			
2021/09/08	Ver.1.0	Product height,	85mm	87mm	
		packing information		Driver packed separately	